LPG VR-L “STANDARD” Reducer:

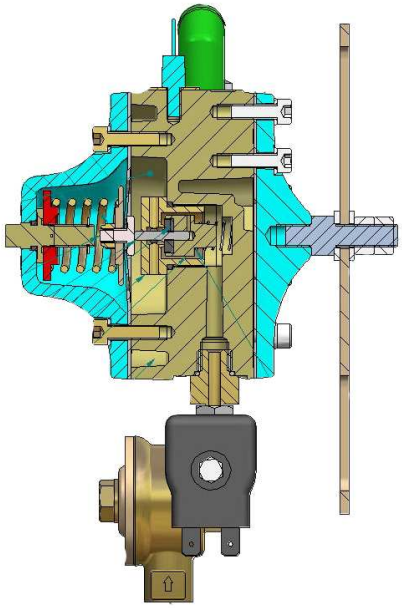

FHT Offers new series of VR-L type of pressure regulators. The latest VR-L reducer was designed on the basis of the most actual engineers knowledge.

It has been tested in extreme conditions. Due to that factor we managed to obtain the most efficient temperature exchange values as well as optimal pressure performance.

The “Standard” reducer is fitted with LPG Solenoid so the valve does not need to be installed separately in the circuit.

VR-L “Standard” Technical Data:

Type of GAS: LPG
Body: Aluminum die cast
Homologations: ECE 67R 01
Gas Outlet Pressure: 1 bar
Maximum Power: 150 kW
Working Temperature Range (^{0}C): -30 /+120
Gas Outlet External Diameter: 12 mm
Gas Inlet: 6 mm
Engine Cooling liquid Outlet/Inlet: 16 mm
Shut-off Valve: supplied
Vacuum nozzle: Present
Solenoid Valve Nominal Voltage: 12V
Overall dimension: 135/190/130 mm
Body Diameter: 100 mm
Weight: 1,0 kg

MINISTER INFRASTRUKTURY
MINISTER OF INFRASTRUCTURE
ul. Chałubińskiego 4/6, PL-00-928 Warszawa

ZAWIADOMIENIE
COMMUNICATION

E20

Packaging style: carton box 19/19/12cm
Groupage carton box dimension: 40/60/25cm
12 pcs of the reducer inside

PROGRAM REGIONALNY
NARODOWA STRATEGIA SPÓJNOŚCI
WOJEWÓDZTWO MAZOWIECKIE
UNIA EUROPEJSKA
EUROPEJSKI FUNDUSZ ROZWOJU REGIONALNEGO
Wydatek współfinansowany przez Unię Europejską ze środków Europejskiego Funduszu Rozwoju Regionalnego oraz ze środków Budżetu Państwa w ramach Regionalnego Programu Operacyjnego Województwa Mazowieckiego 2007-2013