


LPG VR-L "SUPER" Reducer:

FHT offers new series of VR-L "SUPER" type of pressure regulators. The latest VR-L "SUPER" reducer was designed to be used in the most sophisticated engines taking into consideration their power efficiency.

It is supplied with advanced Liquid Phase Heating System. Due to that it ensures stable pressure in spite of outside temperature.

The reducer can be installed in engines up to 220 kW power. It is also integrated with Coil Group Valve that so there is no need to install any additional valve in the circuit.

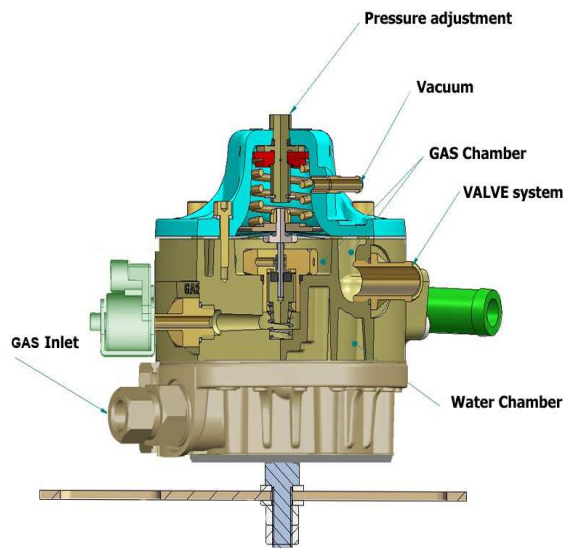

VR-L "SUPER" Technical Data:

- Type of GAS: LPG
- Body: Aluminum die cast
- Liquid Gas Heating System "LGHS": supplied
- Homologations: ECE 67R 01
- Gas Outlet Pressure: 1,2 bar
- Maximum Power: 220 kW (300 HP)
- Working Temperature Range (°C): -30 /+120
- Gas Outlet External Diameter: 14 mm
- Gas Inlet: 8 mm
- Engine Cooling liquid Outlet/Inlet: 16 mm
- Shut-off Valve: integrated
- Vacuum nozzle: Present
- Solenoid Valve Nominal Voltage: 12V
- Overall dimension: 135/190/130 mm
- Body Diameter: 100 mm
- Weight: 1,3 kg

Packaging style: carton box 19/19/12cm
 Groupage carton box dimension: 40/60/25cm
 12 pcs of the reducer inside

MINISTER INFRASTRUKTURY
 MINISTER OF INFRASTRUCTURE
 ul. Chałubińskiego 46, PL-00-928 Warszawa

ZAWIADOMIENIE
 COMERCIAL OFFICE

Ustawa o homologacji...
 ECE 67R 01

Typy wyrobów do celów...
 ECE 67R 01



PROGRAM REGIONALNY
 NARODOWA STRATEGIA SPÓJNOŚCI



WOJEWÓDZTWO
 MAZOWIECKIE

UNIA EUROPEJSKA
 EUROPEJSKI FUNDUSZ
 ROZWOJU REGIONALNEGO

