

# Lynx

Compact & clean LPG reducer for small engines.

Part no.: RD.LX.BASIC

Thanks to a special lever system this reducer is characterized by very high resistance for any kind of dirtiness which comes from gas. Optimized gas flow guarantees high performance of this small device. Lynx weighs less than 1 kg. The reducer is equipped with internal gas filter and electrovalve, which makes its construction more compact. Small dimensions are obvious advantage for the installers as it allows to fix the reducer even in the smallest engine's chambers.



Lightweight and compact



Low-temperature optimized




Designed using  
Computational Fluid Dynamics

## Main features:

- LPG gas type
- Aluminium alloy die cast
- Working pressure: 1 bar (14.5 psi)
- Maximum power: 110 kW (150 HP)
- Working temperature range: -30/+120 °C (-22/+250 °F)
- LPG outlet external diameter: 12 mm
- LPG inlet diameter: 6 mm
- Engine coolant outlet/inlet diameter: 16 mm
- Supplied shut-off valve
- Dimensions: 93,5 x 138 x 130 mm / 3.7 x 5.4 x 5.1 in
- Body diameter: 70 mm / 2.8 in
- Dry weight: 0,97 kg (3.2 lbs)
- Approvals: ECE67R01



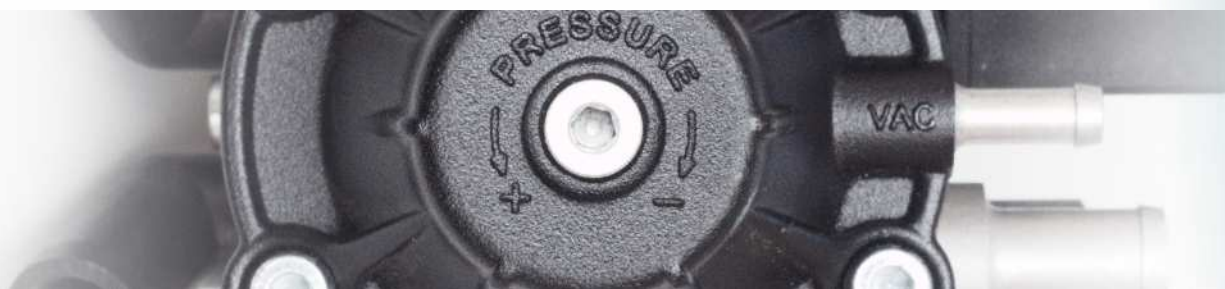

- Aluminium water outlet/inlet available



[www.versusgas.com](http://www.versusgas.com)

+48 25 759 42 61

[info@versusgas.com](mailto:info@versusgas.com)

 **VERSUS**<sup>®</sup>   
AUTO GAS equipment

FHT Export-Import  
ul. Szczecińska 16G  
05-300 Minsk Mazowiecki, POLAND