

FH-02

Versatile LPG / CNG injection system

Part no.: LW.2 / LW.3 / LW.4

Standard injection system for economical gas installations. Modular design allows to be mounted in many ways.

Types available:

FH02 4-cyl - dedicated to 4-cyl & 8-cyl engines, 4 injection channels.


FH02 3-cyl - dedicated to 3-cyl & 6-cyl engines, 3 injection channels.

FH02 2-cyl - dedicated to 4-cyl boxer engines, 2 injection channels.

Main features:

- Power supply: 12V DC
- Operational temperature range : -30 /+120 °C (-22 /+250 °F)
- Gas compatibility: LPG / CNG
- Working pressure range: 0,5 - 2,5 bar (7.25 - 36.25 psi)
- Maximum allowable pressure: 4,5 bar (65 psi)
- Coil resistance: 3 Ohm +/- 4%
- Body: aluminum (FH02-4, FH02-3, FH02-2)
- Opening time: 3,0 ms
- Closing time: 2,5 ms
- LPG / CNG inlet external diameter: 12 mm
- Standard valve seat diameter: 3,3 mm
- Calibration nozzle sizes available: 1,5–3,5 mm (0,25 mm step)
- Normally closed
- Single adapter length: 77,5 mm
- Adapter weight: 104 g
- Approvals: ECE 67R01, ECE110R00

■ Distribution rail for 2/3/4 channels

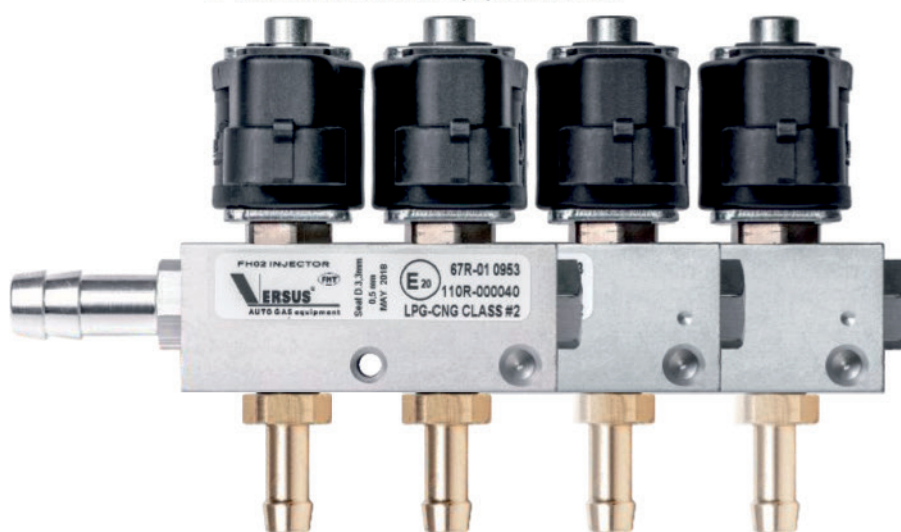

www.versusgas.com

+ 48 25 759 42 61

info@versusgas.com

VERSUSGAS
AUTO GAS equipment

VERSUSGAS Sp. z o.o.
ul. Debowa 82
05-300 Krolewicz, POLAND